

The Cylinder Collection

BAKERSFIELD 4X


Wall Mount Cylinder — Selectable Light Distribution/Direction | Selectable Wattage/CCT



SELECTABLE WATTAGE / LUMENS

Wattage Setting	Low	Medium	High
10" Model	19W (2280 Lumens)	31W (3720 Lumens)	38W (4560 Lumens)
12" Model	10W (1200 Lumens)	16W (1920 Lumens)	20W (2400 Lumens)

SELECTABLE LIGHT DISTRIBUTION SETTINGS

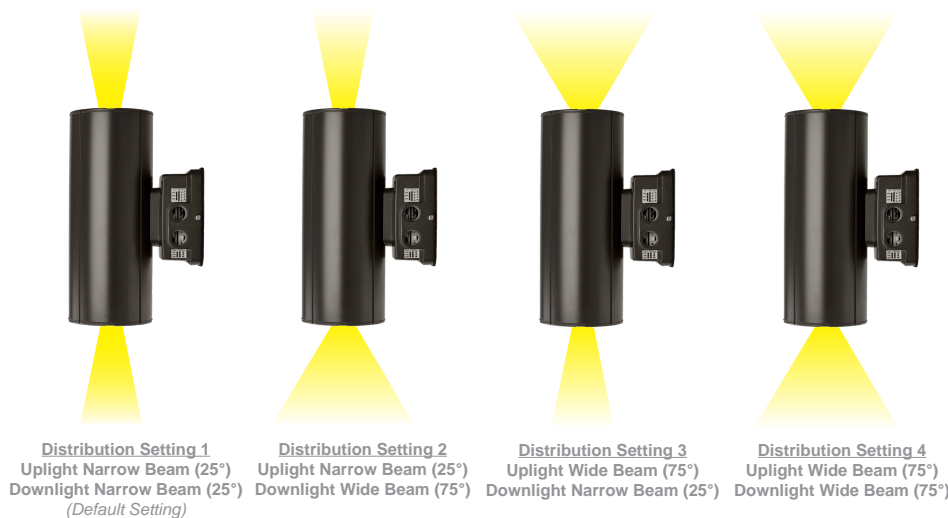

order example:
BF4X-12-SLED-SCCT-UNV-BZ

SERIES

BF4X Bakersfield 4X Series

SIZE

10 9.84" Tall x 6.12" Diameter x 8.66" Depth
12 11.81" Tall x 4.62" Diameter x 7.09" Depth

LED WATTAGE

SLED *Selectable LED Wattages
– Size 10: 19W | 31W | 38W
– Size 12: 10W | 16W | 20W

LED COLOR TEMPERATURE

SCCT *Selectable CCT: 3000K | 4000K | 5000K

VOLTAGE

UNV 120~277 Universal Volt Electronic Driver

STANDARD FINISH

BK Black
BZ Bronze
WHT White

***NOTE:** Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

Catalog Number

Project Name & Location

Type

Product Specifications

DRIVER: Universal Voltage 120/277V Electronic Driver with 0-10V dimming.

FINISH: Durable polyester powdercoat finish applied over pre-treated surfaces.

HOUSING: Heavy gauge aluminum cylinder fully sealed against external contaminants.

LIGHT ENGINE: Energy efficient LED is standard. Selectable Wattage and CCT(80CRI) can be adjusted via switches located on the side of the fixture

LIGHT DISTRIBUTION: Light distribution (Narrow Beam 25° / Wide Beam 75°) and Light Direction (Up/ Full/Down) can be adjusted via switch located on the side of the fixture.

LENS: Clear Tempered Glass.

MOUNTING: Wall Mount featuring Arm.

OPERATIONAL LIFETIME: 50,000 Hours

OPERATIONAL TEMP RANGE: -40°C to 40°C | -40°F to 122°F


PHOTOCELL: Standard Photocell. Can be disabled with included cover cap.

COMPLIANCE: Built to comply with U.S. and Canadian Safety Standards.


cUL/UL Listed for Wet Locations.

WARRANTY: 5-Year Limited Warranty.

DIMENSIONS

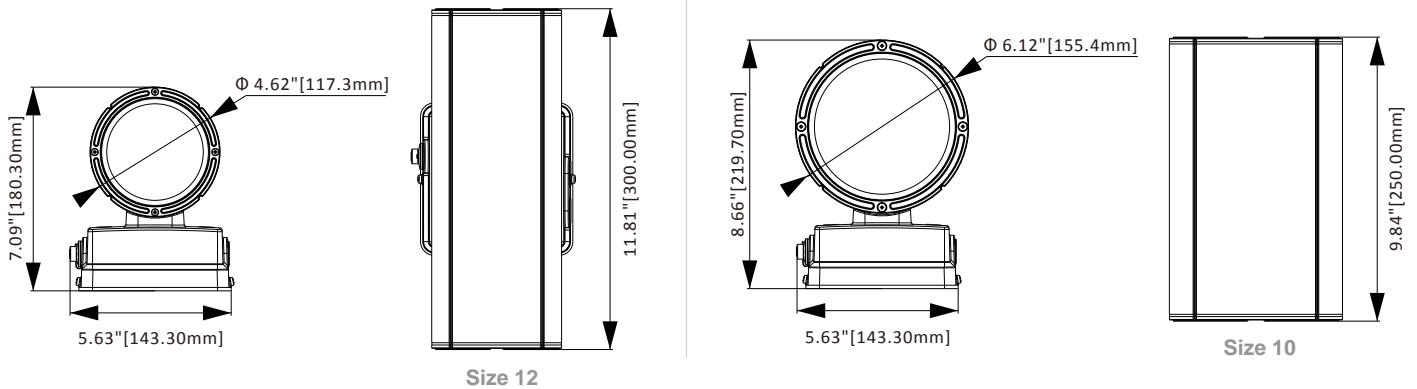

FEATURES



Selectable CCT Settings

3000K | 4000K | 5000K

Selectable Light Distribution Switch

Switch	Distribution Selection	Default Setting
1	Uplight Narrow (25°) & Downlight Narrow (25°)	Switch 1
2	Uplight Narrow (25°) + Downlight Wide (75°)	
3	Uplight Wide (75°) + Downlight Narrow (25°)	
4	Uplight Wide (75°) + Downlight Wide (75°)	

Selectable Wattage Switch

Model Size	Selectable Power Setting (L1/L2/L3)	Default Setting
Size 10	38W(L1) 31W(L2) 19W(L3)	38W(L1) Default
Size 12	20W(L1) 16W(L2) 10W(L3)	20W(L1) Default

Selectable Light Direction Switch


Up	Uplight Only	Full (Uplight and Downlight) is the default setting. <i>Note: When Uplight Only or Downlight Only is selected, the wattage is halved.</i>
Full	Uplight and Downlight	
Down	Downlight Only	

PHOTOCELL


PHOTOMETRY



Photocell can be enabled or disabled by removing or placing on the included cover cap.



Narrow Distribution (25°)

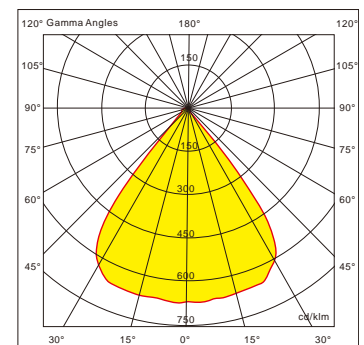

Wide Distribution (75°)