

# The North American Collection

## “WISCONSIN” ROUND MEDIUM (Selectable Wattage/CCT Series)

Indoor/Outdoor — Vandal Wall Pack Family | Selectable Wattage / CCT



Greenbay (GB)



Kenosha (KN)



Milwaukee (ML)



Hudson (HU)



Kenosha Flat Lens (KN-F)



### SELECTABLE LED WATTAGE / LUMENS

Selectable LED Wattage / Lumen Output		
Low Power	Medium Power	High Power
13.5 Watt (2150 Lumens)	17 Watt (2400 Lumens)	20.5 Watt (3150 Lumens)

**Note:** Lumen output based on 4000K CCT.

Catalog Number

Project Name & Location

Type

### Product Specifications

**DIFFUSER:** Smooth Opal White Injection Molded Polycarbonate standard. Optional Frosted Opal Lens (FRO).

**DRIVER:** Universal Voltage 120/277v Electronic Driver with 0-10V dimming.

**EMERGENCY:** Optional Integral or Remote LED Emergency Battery

**FASTENERS:** (4) Stainless steel tamperproof Torx screws to secure lens to backplate.

**FINISH:** Extremely durable oven baked Polyester Powder Coat is Standard.

**GASKETING:** One Piece Die Cut 3/16" Thick Black EPDM.

**HOUSING:** Marine Grade cast aluminum.

**LIGHT ENGINE:** Energy Efficient Light Emitting Diode - Selectable Wattage/CCT.

**MOUNTING HOLES:** (4) 5/16" Diameter Holes for 1/4" Diameter Bolts.

**COMPLIANCE:** Built to comply with U.S. and Canadian Safety Standards. Suitable for Wet Locations.

**WARRANTY:** 5-Year Limited Warranty.

### order example:

**KN-6-SLED-SCCT-UNV-BK-OCC**

#### SERIES

GB Greenbay Series

HU Hudson Series

KN Kenosha Series

KN-F Kenosha Flat Lens Series

ML Milwaukee Series

#### SIZES

6 13.75" Diameter Height x 6.5" Depth

#### LED WATTAGES

**Note:** Refer to Chart for Lumen Output

SLED \*Selectable LED Wattage: 13.5W | 17W | 20.5W

#### LED COLOR TEMPERATURE (CCT)

SCCT \*Selectable CCT: 3000K | 3500K | 4000K | 5000K

#### VOLTAGES

UNV 120~277 Universal Volt Driver

#### STANDARD FINISH

BK Black

WHT Textured White

#### PREMIUM UPCHARGE FINISH

**Note:** Premium Finishes Require MOQ = 5pcs

BZ Bronze

PA Painted Aluminum

CC Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))

— Provide RAL# or Make-to-Match Color Chip

#### INHIBITOR FINISH

**Note:** Inhibitor Finishes Require MOQ = 5pcs

+NAT Epoxy Coating for Natatorium

+OFC Epoxy Coating for Ocean Front Environments

#### MOUNTING OPTIONS

PEND12 Pendant Mount (12" Stem)  
— Includes Canopy Swivel Kit (45°)

PEND(XX) Pendant Mount with Custom Stem Length  
— XX = Stem Length (inches)  
— Includes Canopy Swivel Kit (45°)

SR Semi-Recessed

#### LENS OPTIONS

FRO Frosted Opal

FLO Flat Opal White Flat Lens for KN-F Series

FLP Flat Prismatic Clear Lens for KN-F Series

RC Ribbed Clear

RF Ribbed Frosted

RW Ribbed White

#### PHOTOCELL OPTIONS

PHTD Photocell Button (120/277V)

#### SENSOR CONTROL

**Note:** Motion Sensor Max Mounting Height 18-Feet

OCC Occupancy Sensing / Motion Sensor Integral  
— Microwave / Single Feed / 120/277 Only  
— Stand-by Dimming Level Presets: ON/OFF

#### MISC OPTIONS

FUS Fuse and Fuseholder

**Additional Options on PAGE 3** 

**\*NOTE:** Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.



## The North American Collection

### “WISCONSIN” ROUND MEDIUM (Static Wattage/CCT Series)

Indoor/Outdoor — Vandal Wall Pack Family | Static Wattage / CCT (Non-Selectable)



Greenbay (GB)



Kenosha (KN)



Milwaukee (ML)



Hudson (HU)



Kenosha Flat Lens (KN-F)



#### order example:

KN-6-SLED-SCCT-UNV-BK-OCC

#### SERIES

GB Greenbay Series

HU Hudson Series

KN Kenosha Series

KN-F Kenosha Flat Lens Series

ML Milwaukee Series

#### SIZES

6 13.75" Diameter Height x 6.5" Depth

#### LED WATTAGES

LED40 LED 40 Watt (Static Wattage - Non-Selectable)

#### LED COLOR TEMPERATURE (CCT)

CT3 ±3000K LED Color Temp

CT35 ±3500K LED Color Temp

CT4 ±4000K LED Color Temp

CT5 ±5000K LED Color Temp

#### VOLTAGES

UNV 120-277 Universal Volt Driver

#### STANDARD FINISH

BK Black

WHT Textured White

#### PREMIUM UPCHARGE FINISH

Note: Premium Finishes Require MOQ = 5pcs

BZ Bronze

PA Painted Aluminum

CC Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))

— Provide RAL# or Make-to-Match Color Chip

#### INHIBITOR FINISH

Note: Inhibitor Finishes Require MOQ = 5pcs

+NAT Epoxy Coating for Natatorium

+OFC Epoxy Coating for Ocean Front Environments

#### MOUNTING OPTIONS

PEND12 Pendant Mount (12" Stem)  
— Includes Canopy Swivel Kit (45°)

PEND(XX) Pendant Mount with Custom Stem Length  
— XX = Stem Length (inches)  
— Includes Canopy Swivel Kit (45°)

SR Semi-Recessed

#### LENS OPTIONS

FRO Frosted Opal

FLO Flat Opal White Flat Lens for KN-F Series

FLP Flat Prismatic Clear Lens for KN-F Series

RC Ribbed Clear

RF Ribbed Frosted

RW Ribbed White

#### PHOTOCELL OPTIONS

PHTD Photocell Button (120/277V)

#### SENSOR CONTROL

Note: Motion Sensor Max Mounting Height 18-Feet

OCC Occupancy Sensing / Motion Sensor Integral  
— Microwave / Single Feed / 120/277 Only  
— Stand-by Dimming Level Presets: ON/OFF

#### MISC OPTIONS

FUS Fuse and Fuseholder

Additional Options on PAGE 3

Catalog Number

Project Name & Location

Type

#### Product Specifications

**DIFFUSER:** Smooth Opal White Injection Molded Polycarbonate standard. Optional Frosted Opal Lens (FRO).

**DRIVER:** Universal Voltage 120/277v Electronic Driver with 0-10V dimming.

**EMERGENCY:** Optional Integral or Remote LED Emergency Battery

**FASTENERS:** (4) Stainless steel tamperproof Torx screws to secure lens to backplate.

**FINISH:** Extremely durable oven baked Polyester Powder Coat is Standard.

**GASKETING:** One Piece Die Cut 3/16" Thick Black EPDM.

**HOUSING:** Marine Grade cast aluminum.

**LIGHT ENGINE:** Energy Efficient Light Emitting Diode - Static Wattage/CCT (Non-Selectable).

**MOUNTING HOLES:** (4) 5/16" Diameter Holes for 1/4" Diameter Bolts.

**COMPLIANCE:** Built to comply with U.S. and Canadian Safety Standards. Suitable for Wet Locations.


**WARRANTY:** 5-Year Limited Warranty.

## The North American Collection

### “WISCONSIN” ROUND MEDIUM (Selectable or Static Series)


Indoor/Outdoor — Vandal Wall Pack Family

#### DIMENSIONS

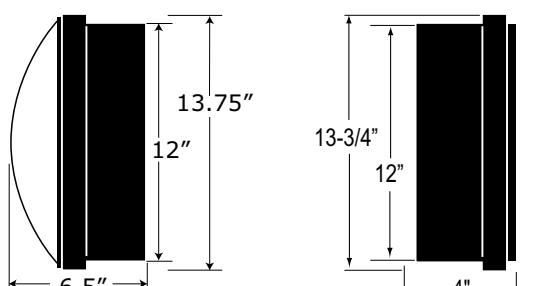

6" Size

6" Size  
Flat Lens Option

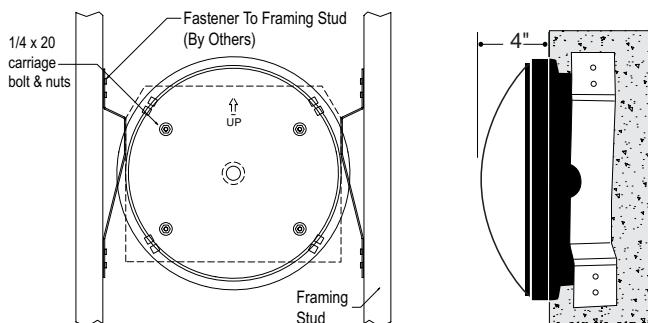

Shown with Semi-Recessed Option (SR)

#### PENDANT MOUNT OPTION



Kenosha Flat Lens  
Pendant Mount

Kenosha  
Pendant Mount

Pendant Mount Includes  
Canopy Swivel Kit

#### EMERGENCY BATTERY OPTIONS

- Meets California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standards
- Cold Weather Batteries DO NOT meet CEC Standards
- Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C

• Max Whip Length for REM Option is 8 Feet

EM8W Integral 8 Watt LED (Not Compatible with KN-F)

EM10W Integral 10 Watt LED (Not Compatible with KN-F)

EM16W Integral 16 Watt LED (Not Compatible with KN-F)

REM8W Remote 8 Watt LED

REM10W Remote 10 Watt LED

REM16W Remote 16 Watt LED

EM10W- INTEGRAL 10 Watt LED - Cold Weather  
CW (Not Compatible with KN-F)

REM10W- Remote 10 Watt LED - Cold Weather  
CW

#### ACCESSORY OPTIONS

Order As A Separate Line

REMT0009 Remote Controller for Sensor Options

TPD Tamperproof Screwdriver